UTILITY PATENT APPLICATION TRANSMITTAL

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Attorney Docket No.	4101-0206-55X
First Named Inventor or Application Identifier	Veronique SARDOY
Title	PROCESS FOR PRODUCING A THIN SHEET OF ULTRA-LOW-CARBON STEEL FOR THE MANUFACTURE OF DRAWN PRODUCTS FOR PACKAGING AND THIN SHEET OBTAINED

APPLICATION ELEMENTS
See MPEP chapter 600 concerning utility application contents

ADDRESS TO: Assistant Commissioner for Patents
Box Patent Applications
Washington, DC 20231

1. ■ Fee Transmittal Form
   (Submit an original, and a duplicate for fee processing)

2. ■ Specification   [Total Pages 28]

3. ■ Drawing(s)   [Total Sheets 5]

4. Oath or Declaration   [Total Pages]
   a.☐ Newly executed (original or copy)
   b.☐ Copy from a prior application (37 CFR 1.63(d))
       (for continuation/divisional with Box 17 completed)
       [Note Box 5 below]
       i.☐ <u>DELETION OF INVENTOR(S)</u>
       Signed statement attached deleting inventor(s)
       named in the prior application,
       see 37 CFR 1.63(d)(2) and 1.33(b).

5.☐ Incorporation By Reference (*useable if Box 4b is checked*)
   The entire disclosure of the prior application, from
   which a copy of the oath or declaration is supplied
   under Box 4b, is considered as being part of the
   disclosure of the accompanying application and is
   hereby incorporated by reference therein.

ACCOMPANYING APPLICATION PARTS

6. ☐ Assignment Papers (cover sheet & document(s))
7. ☐ 37 CFR 3.73(b) Statement   ☐ Power of Attorney
       (*when there is an assignee*)
8. ☐ English Translation Document (*if applicable*)
9. ■ Information Disclosure   ■ Copies of IDS Citations
       Statement (IDS)/PTO-1449
10. ☐ Preliminary Amendment
11. ■ White Advance Serial No. Postcard
12. ☐ Small Entity   ☐ Statement filed in prior app,
       Statement(s)   Status still proper and desired
13. ☐ Certified Copy of Priority Document(s)
14. ■ Other: REQUEST FOR PRIORITY; LETTER AND LIST OF INVENTORS NAMES AND ADDRESSES; FRENCH SEARCH REPORT; TRANSLATION OF CATEGORY OF CITED DOCUMENTS IN ATTACHED FOREIGN LANGUAGE SEARCH REPORT

---

15. If a CONTINUING APPLICATION, *check appropriate box and supply the requisite information*:
    ☐ Continuation   ☐ Divisional   ☐ Continuation-in-part (CIP)   of prior application No:

---

16. Amend the specification by inserting before the first line the sentence:
    This application is a   ☐ Continuation   ☐ Division   ☐ Continuation-in-part (CIP)
    of application Serial No. , filed on .

---

17. CORRESPONDENCE ADDRESS

OBLON, SPIVAK, MCCLELLAND, MAIER &
NEUSTADT, P.C.
FOURTH FLOOR
1755 JEFFERSON DAVIS HIGHWAY
ARLINGTON, VIRGINIA 22202
(703) 413-3000
FAX NO. (703) 413-2220

Respectfully submitted;

OBLON, SPIVAK, MCCLELLAND, MAIER &
NEUSTADT, P.C.

Jean-Paul Lavalleye
Attorney of Record
Registration No. 31,451

Richard L. Treanor, Ph.D.
Registration No. 36,379

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

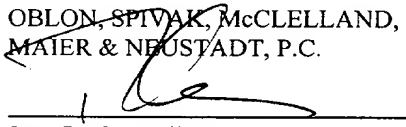Inventor(s): VERONIQUE SARDOY ET AL

Serial No: NEW APPLICATION

Filing Date: HEREWITH

Title: PROCESS FOR PRODUCING A THIN SHEET OF ULTRA-LOW-CARBON STEEL FOR THE MANUFACTURE OF DRAWN PRODUCTS FOR PACKAGING AND THIN SHEET OBTAINED

FEE TRANSMITTAL

Assistant Commissioner For Patents
Washington, D.C. 20231

CLAIMS	(1) FOR	(2) NUMBER FILED	(3) NUMBER EXTRA	(4) RATE	(5) CALCULATIONS
	TOTAL CLAIMS	13 -20=	0	X $22=	$0.00
	INDEPENDENT	2 -3=	0	X $82=	$0.00
	MULTIPLE DEPENDENT CLAIMS (if applicable)			+ $270=	$270.00
	LATE FILING OF DECLARATION			+ $130=	$130.00
			BASIC FEE		$790.00
			TOTAL OF ABOVE CALCULATIONS =		$1,190.00
	Reduction by 50% for filing by small entity				
	☐ FILING IN NON-ENGLISH LANGUAGE			+ $130=	$0.00
	☐ RECORDATION OF ASSIGNMENT			+ $40=	$0.00
				TOTAL	$1,190.00

☐ Please Charge My Deposit Account No. 15-0030 in the Amount of . A Duplicate copy of this sheet is enclosed.

■ The Commissioner is hereby authorized to charge any additional fees which may be required for the papers being filed herewith and for which no check is enclosed herewith, or credit any overpayment to Account No. 15-0030. A duplicate copy of this sheet is enclosed.

■ A check in the amount of $1,190.00 to cover the filing fee is enclosed.

Respectfully submitted,

OBLON, SPIVAK, McCLELLAND, MAIER & NEUSTADT, P.C.

Jean-Paul Lavalleye
Attorney of Record
Registration No. 31,451

Richard L. Treanor, Ph.D.
Attorney
Registration No. 36,379

Date 8/3/58

Fourth Floor
1755 Jefferson Davis Highway
Arlington, Virginia 22202
(703) 413-3000
Fax No. (703) 413-2220

DOCKET NO.: 4101-0206-55X

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

IN RE APPLICATION OF: VERONIQUE SARDOY ET AL

FOR: PROCESS FOR PRODUCING A THIN SHEET OF ULTRA-LOW-CARBON STEEL
FOR THE MANUFACTURE OF DRAWN PRODUCTS FOR PACKAGING AND
THIN SHEET OBTAINED

FILED: HEREWITH

LETTER

ASSISTANT COMMISSIONER FOR PATENTS
WASHINGTON, D.C. 20231

SIR:

    Attached hereto is a list of the Inventors names and addresses.

    A Declaration containing all the necessary information will be submitted at a later date.

Respectfully submitted,

OBLON, SPIVAK, McCLELLAND,
MAIER & NEUSTADT, P.C.

Jean-Paul Lavalleye
Attorney of Record
Registration No. 31,451

Richard L. Treanor, Ph.D.
Registration No. 36,379

Fourth Floor
1755 Jefferson Davis Highway
Arlington, Virginia 22202
Telephone: (703) 413-3000
Facsimile: (703) 413-2220

LIST OF INVENTORS' NAMES AND ADDRESSES

Veronique SARDOY

24 rue des tilleuls
57070 Metz, France

Gilles DAHMEN

37 rue des platanes
57940 Volstroff, France

Isabelle POISSONNET

19 rue de la Resistance
59470 Wormhout, France

Anne BLANCHARD

Hameau des 4 vents
162 avenue de verger de moise
13800 Istres, France

Pascal CHOQUET

31 rue de Valenciennes
59240 Dunkerque, France

Bernard DEBIESME

119 rue du Lac
59254 Ghyvelde, France

Process for producing a thin sheet of ultra-low-carbon steel for the manufacture of drawn products for packaging and thin sheet obtained

ABSTRACT

A killed and vacuum-degassed very-low-carbon steel containing, by weight, between 0.10 and 0.35% manganese, less than 0.006% nitrogen, less than 0.025% phosphorus, less than 0.020% sulphur, less than 0.020% silicon, at most 0.08% of at least one of the elements copper, nickel and chromium, as well as aluminium. The steel is cast in the form of a slab, the slab is hot rolled in order to obtain a hot-rolled sheet, the hot-rolled sheet is coiled, the hot-rolled sheet is cold rolled in two rolling operations separated by a continuous annealing operation. The steel contains at most 0.006% carbon by weight and 0.010% aluminium and the hot-rolled sheet is coiled at a temperature below 620°C. Preferably, the steel is killed by mixing with a slag containing adjusted amounts of aluminium and of alumina.

Figure 2B.

The invention relates to a process for producing a thin sheet of ultra-low-carbon steel for the manufacture of drawn products for packaging, such as cans, and a thin sheet obtained by the process.

5   In order to manufacture, by drawing, steel packaging products such as cans for foodstuffs or for drinks, blanks are used which are cut from thin sheets whose properties have been tailored to the drawing-type forming process.

10   The drawing processes used for manufacturing cans for preserved food or for drinks are generally drawing-redrawing (DRD) or drawing and wall ironing (DWI) processes.

    In either case, it is known to use thin sheets of 15 very-low-carbon or ultra-low-carbon (ULC) steel whose carbon content by weight is a few thousandths of a per cent and generally less than 8 thousandths of a per cent.

    A process is known, for example from FR 95/02208, for producing a thin sheet intended for the manufacture 20 of a can, of the drinks-can type, by drawing and wall ironing using a steel having the following composition by weight:

- carbon < 0.008%,
- manganese, between 0.10 and 0.30%,
25   - nitrogen < 0.006%,
- aluminium, between 0.01 and 0.06%,
- phosphorus < 0.015%,
- sulphur < 0.020%,
- silicon < 0.020%,
30   - at most 0.08% of one or more of the elements copper, nickel and chromium,
the balance of the composition consisting of iron and inevitable impurities.

    In general, in the case of the manufacture of 35 cans by the drawing-redrawing (DRD) or drawing and wall ironing (DWI) processes, specific mechanical properties and drawability characteristics are required with regard to the thin sheets or to the blanks cut from these sheets which are subjected to the drawing operation.

In particular, the thin sheets must have a low tendency to form ears during drawing and must have very good properties for being able to be drawn by necking.

Good drawability is characterized by a high Lankford coefficient or normal anisotropy coefficient and by a plane anisotropy coefficient ΔC close to zero.

Furthermore, it is also sought to obtain a microstructure of the steel which is as homogeneous as possible over the width of the sheet and along its edges, so as to obtain homogeneous behaviour of the blanks while they are being drawn. In addition, a microstructure as close as possible to a microstructure containing homogeneous equiaxed grains is desired in the sheet intended for drawing.

Because the thickness of the metal packaging in the finished state may be very small (for example, less than 0.1 mm), it is also necessary to use a sheet free of defects such as inclusions, i.e. a material having the best possible inclusion cleanliness.

The thin steel sheets for manufacturing drawn packages are generally produced from an aluminium-killed vacuum-degassed steel, generally cast continuously in the form of a slab which is then hot rolled so as to obtain a hot-rolled strip which is then cold rolled in two steps separated by a recrystallization annealing step.

The second rolling operation, which is generally carried out on a skin-pass rolling mill, makes it possible to obtain a sheet having the final thickness of the product on which the drawing operation is carried out.

In the case of the manufacture of ultra-low-carbon steels, the steel produced in the metallurgical furnace is subject to vacuum degassing, generally with the injection of oxygen, and is aluminium killed before being cast in a continuous casting plant for producing a slab.

The slab is hot rolled at a temperature above the Ar3 point of the steel in order to obtain a hot-rolled sheet whose thickness is generally less than 3 mm.

Next, the hot-rolled sheet is cold rolled with a reduction ratio generally greater than 80% in order to obtain an intermediate cold-rolled sheet or blank which is then annealed at a temperature below the Ac1 point of

5   the steel before the final skin-pass rolling, the reduction ratio of which depends on the intended application of the sheet.

Vacuum-degassed aluminium-killed ultra-low-carbon steel sheets have suitable characteristics with regard to

10   their drawability, the homogeneity of the microstructure obtained after the manufacturing cycle, and the inclusion cleanliness.

However, the manufacture of novel packages of complex shapes with ever thinner walls requires ever

15   higher properties to be obtained.

A process has been proposed in EP-0,521,808 for producing sheets intended for deep drawing, for example for the manufacture of cans by the DRD process from a converter-smelted steel containing at most 0.015% carbon

20   and less than 0.040% aluminium. The process includes hot rolling. The hot-rolled sheet is coiled at a temperature above 650°C, then cold rolled and finally annealed at a temperature below 700°C. The need to coil at a temperature above 650°C leads to heterogeneities in the

25   properties of the strip, in the transverse direction and between the ends and the core of the coil. In addition, coiling at a temperature above 650°C leads to a hot-rolled sheet structure which is not very favourable for obtaining a fine-grained cold-rolled sheet (ASTM index

30   greater than 9).

US-3,404,047 describes a process for manufacturing a sheet for deep drawing having a very low carbon content (C ≤ 0.004%). This very low carbon content is obtained by carrying out a decarburizing annealing

35   operation on the sheet. Because of the annealing conditions (2 to 20 hours at 715°C), the grain index of the sheet is very low (6 to 7).

EP-0,659,889 describes a process for manufacturing a cold-rolled sheet containing a very small

proportion of carbon (C ≤ 0.004%) and having a very low aluminium content (between 0.005 and 0.070%). The steel has a niobium content which is greater than 0.001% and which can be as much as 0.018%. Because of the presence of niobium, the recrystallization temperature of the steel, and therefore the temperature of the recrystallization annealing, is substantially higher than in niobium-free steels.

The object of the invention is to provide a process for producing a thin sheet of ultra-low-carbon steel for the manufacture of drawn packaging products, in which process:

- a killed and vacuum-degassed steel containing, by weight: between 0.10 and 0.35% manganese, less than 0.006% nitrogen, less than 0.025% phosphorus, less than 0.020% sulphur, less than 0.020% silicon, at most 0.08% of one or more elements from among copper, nickel and chromium, as well as aluminium,
the balance of the composition consisting of iron and inevitable impurities, is produced,

- the steel is cast in the form of a slab,

- the slab is hot rolled at a temperature above Ar3 in order to obtain a hot-rolled sheet,

- the hot-rolled sheet is coiled,

- the hot-rolled sheet is cold rolled into the form of an intermediate cold-rolled sheet,

- the intermediate cold-rolled sheet is continuously annealed at a temperature below Ac1, and

- the intermediate cold-rolled sheet is rerolled to a final sheet thickness for drawing,
the process according to the invention making it possible to substantially improve the drawability, the inclusion cleanliness and the microstructural homogeneity of the sheet for drawing.

To this end, the steel is produced so as to contain at most 0.006% carbon by weight and 0.010% aluminium by weight and the hot-rolled sheet is coiled at a temperature below 620°C and preferably between 530°C and 570°C.

The invention also relates to a production process in which the steel is killed by bringing an unkilled steel obtained by smelting in a metallurgical furnace into contact with a slab containing, in particular, aluminium and alumina Al_2O_3.

The invention also relates to a production process in which the steel is cast in the form of a slab in an inert-gas continuous casting plant.

Finally, the invention also relates to a thin sheet having a homogeneous equiaxed-grain structure with a low inclusion content and having very good drawability characteristics, made of an ultra-low-carbon steel containing less than 0.010% aluminium.

In order to make the invention clearly understood, a description will now be given of several examples of the production of thin sheets according to the invention and of the microstructural characteristics and drawability characteristics of these sheets, with reference to the figures appended hereto.

Figure 1 is a diagram giving the percentage of recrystallization as a function of temperature for steels having different aluminium contents.

Figures 2A, 2B, 2C, 2D and 2E are microstructures, after recrystallization, of cold-rolled steel sheets having different aluminium contents, these increasing from Figure 2A to Figure 2E.

Figure 3 is a diagram giving the yield stress as a function of the aluminium content of steel sheets for drawing which are produced according to the invention and, by way of comparison, according to the prior art.

Figure 4 is a diagram giving the tensile strength as a function of the aluminium content of steel drawing sheets produced by the process according to the invention and, by way of comparison, of steel sheets produced according to the process known from the prior art.

Figures 5A, 5B and 5C are diagrams showing the anisotropy coefficient r of a drawing sheet according to the invention in the longitudinal direction of the sheet, in the transverse direction and at 45°, respectively.

Figure 6 is a diagram giving the average anisotropy coefficient r as a function of the aluminium content of steel drawing sheets produced according to the invention and, by way of comparison, produced according to the prior art.

In the context of a comparative study between the process for producing drawing sheets according to the invention, which is characterized in particular by very low carbon contents and aluminium contents in the thin sheets obtained, and drawing sheets produced according to the process known from the prior art, these sheets having aluminium contents greater than 0.010% by weight, various steel heats differing substantially only in their aluminium contents were produced. After hot rolling, the sheet is rapidly cooled and coiled at a temperature below 620°C. Table 1 below gives the compositions of the steels used for the manufacture of drawing sheets by cold rolling hot-rolled sheets.

TABLE 1

Lab. refer- ence	End-of- roll. temp.	Coil temp.	Coil thick. (mm)	C	N	Mn	P	S	Cu	Ni	Cr	Met. Al.	Res. ti (ppm)
M825	880°C	530°C	2.72	2.7	3.4	201	11	5	8	18	14	2	3
R2116A	875°C	570°C	2.96	3.5	3.5	202	13	11	8	15	15	8	1
R2115A	883°C	563°C	2.95	3.2	3.5	201	12	11	8	16	16	10	1
R1048C1	894°C	560°C	3.01	2.6	2.2	201	10	6	6	18	15	24	1
R1285	900°C	590°C	3.09	3.2	2.9	198	10	5	11	17	24	37	7
S 385	881°C	579°C	2.00	2.9	3.0	197	10	11	11	19	17	56	4
R1757A	871°C	559°C	3.04	3.4	5.0	237	3	5	14	18	30	64	4

In Table 1, the weight contents of the various elements are given in thousandths of a per cent, apart from the titanium content which is given in ppm, i.e. in tenths of thousandths of a per cent.

Chemical analyses were carried out on the hot-rolled sheets constituting the product obtained in an intermediate step of the production process.

Indicated in the first column are the reference

numbers of the sheets; these reference numbers will be used to denote the sheets until their final state, i.e. in the state of thin sheets for drawing.

The first three sheets, having the reference numbers M825, R2116A and R2115A, are produced according to the process of the invention and have aluminium contents at most equal to 10 thousandths of a per cent.

The next four sheets indicated in Table 1 are given by way of comparison and relate to sheets produced according to the prior art and containing 24 thousandths of a per cent aluminium or more.

The second column in Table 1 indicates the end-of-rolling temperature and the third column indicates the coiling temperature of the hot-rolled sheet.

The fourth column in the table relates to the thicknesses of the hot-rolled sheets.

The next columns in the table indicate the weight contents of the various elements in the steel of the sheets.

The steels used for producing the hot-rolled sheets are smelted in a metallurgical furnace and then poured into a ladle. The steel is vacuum degassed and killed before being cast in a continuous slab casting plant.

The vacuum degassing of the steel is preferably carried out in an RHOB plant, i.e. by blowing pure oxygen into the moving steel in a vacuum chamber, or in an in-vessel vacuum plant.

The steels for metal packaging are generally killed by adding aluminium to the steel.

Such a process was used in the case of the comparative steels.

Such an aluminium killing process can no longer be applied in the case of steels which contain less than 0.010% aluminium.

In the case of the three steels according to the invention, containing less than 0.010% aluminium, the killing operation was carried out by a reaction between the slag and the steel, during mixing.

However, it is necessary to add a mixture of aluminium and alumina Al_2O_3 to the slag in order to prevent the steel from reoxidizing. This is because the slag contains a high proportion of FeO and the aluminium traps the oxygen released by the FeO during mixing.

By adjusting the amounts of aluminium and alumina in the slag, the final aluminium content of the steel may be adjusted to a value of less than 0.010%.

Vacuum degassing, which is a standard technique in the production of ultra-low-carbon steels, makes it possible to obtain a carbon content of less than 0.006%.

In the case of the steels produced, the composition of which is given in Table 1, the carbon contents of these steels are all between 26 and 35 ppm.

So as to allow meaningful comparisons of the mechanical properties of the steels, certain corrections will be made in order to reduce the mechanical properties to a standard carbon content of 25 ppm.

In general, the carbon content of the ultra-low-carbon steels according to the invention is less than 0.006%.

These steels have a nitrogen weight content ranging from 22 to 50 ppm. In general, for the steels intended for the manufacture of thin sheets for packaging, the nitrogen content is always less than 0.006%, or 60 ppm.

Also in such steels, the manganese content is generally between 0.10 and 0.35%. In the case of the steels in Table 1, the manganese contents are between 0.197 and 0.237%. In the steels for thin sheets for metal packaging, the phosphorus content and the sulphur content must be limited to 0.025%, preferably 0.015%, and to 0.020%, respectively. In the case of the steels of the examples in Table 1, these contents are between 0.003 and 0.013% and between 0.005 and 0.011%, respectively.

Likewise, in the steels for metal packaging in the form of thin sheets, the elements such as copper, nickel and chromium must not together be in an amount greater than 0.08%.

In the case of the steels in Table 1, this total copper, nickel and chromium content is at most equal to 0.062%.

Furthermore, it has been possible to show that low contents of titanium and of niobium could significantly increase the complete recrystallization temperature of the sheets.

In order to obtain suitable sheet recrystallization conditions, the titanium content is necessarily limited to 10 ppm and preferably to 6 ppm.

Likewise, niobium must be limited to 10 ppm.

In ultra-low-carbon steels known from the prior art, the metallic aluminium content after producing the sheets is generally greater than 0.010% by weight or 10 thousandths of a per cent, this content generally being between 10 and 60 thousandths of a per cent.

The particular method of producing the steels according to the invention and the desire to have an aluminium content at most equal to 0.010% make it possible to obtain, as will be shown below, sheets having an improved microstructure, a much greater microstructural homogeneity, greater inclusion cleanliness and better drawability characteristics.

In particular, it has been possible to show that the improvement in the microstructure of the sheets, the better microstructural homogeneity and the good drawability characteristics were due to the low residual aluminium content.

The killed steel is vacuum degassed and cast in a continuous slab casting plant in an inert atmosphere.

Casting in an inert atmosphere prevents reoxygenation of the steel during continuous casting and therefore prevents effervescence and break-out phenomena occurring during casting.

The slab cast in the continuous casting plant is hot rolled at a temperature above the Ar3 temperature of the steel.

In the case of the sheets mentioned in Table 1, the second column indicates the end-of-rolling tempera-

ture of the hot-rolled sheets.

Next, the hot-rolled sheets are coiled at a temperature below the recrystallization temperature of the steel, and always below 620°C.

5   Table 2 below gives the microstructural characteristics of the hot-rolled sheets, the compositions and rolling conditions of which are given in Table 1.

<div align="center">TABLE 2</div>

Reference	GI	El	$R_{p0.2, T}$ (MPa)	$R_{m, T}$ (MPa)	A%	r_T
M825	8.5	1.0	216	316	40.0	1.01
R2116A	8.7	1.0	292	349	29.4	0.81
R2115A	8.2	1.0	281	333	33.5	0.99
R1048 C1	8.2	1.0	276	333	35.0	0.95
R1285	7.0	1.0	238	317	36.3	0.96
S 385	8.0	1.0	226	318	36.2	0.90
R1757A	10	1.0	255	342	34.7	0.84

20   The first column in the table gives the reference numbers of the hot-rolled sheets; the second column gives the grain index of the hot-rolled sheet and the third column the elongation of the grains.

The microstructural characteristics correspond to the central part in the core of the hot-rolled sheets.

25   It appears that the core microstructure of the various hot-rolled sheets does not seem to be dependent on the aluminium content.

A finer grain (GI = 10.0) in the case of the R1757A specimen seems to be due essentially to the

30 presence of larger amounts of nitrogen, manganese, copper and chromium in the alloy. In contrast, the coarser grains (GI = 7.0) in the case of the R1285 specimen seem to be related to the rolling having been carried out at a higher temperature (900°C), resulting in austenitic

grain coarsening.

Table 2 also gives, in columns 4, 5, 6 and 7 respectively, the 0.2% yield stress of the sheets in the transverse direction, the tensile strength in the transverse direction, the elongation at break and the standard anisotropy coefficient rT in the transverse direction.

It will be seen that, as the aluminium content of the steel increases, there is an increase in the mechanical properties and a decrease in the elongation as well as a decrease (apart from in the case of the R2116A sheet) in the normal anisotropy coefficient r_T.

After cooling, the hot-rolled sheets are cold rolled with a reduction ratio of 85 to 95%. Intermediate sheets are thus obtained which have a thickness of about 0.2 to 0.3 mm.

Next, these sheets are annealed in a continuous annealing plant at a temperature below the Ac1 temperature of the steel.

The blank of cold-rolled sheet is then rerolled down to a final sheet thickness for drawing.

The continuous annealing is carried out at a temperature which is generally 20°C to 30°C above the recrystallization temperature of the steel; in the case of the process according to the invention, the annealing temperature is at most equal to 700°C; the heating rate of the sheet is about 27°C per second. The steel is maintained at the annealing temperature above the recrystallization temperature for a time which is less than 3 minutes and which is generally, for practical reasons, approximately 20 or 30 seconds. After continuous annealing, the sheet is firstly cooled at a rate of about 8°C per second and secondly at a rate of about 10°C per second.

Depending on the intended application of the drawing sheets, the steps of cold rolling and of annealing the hot-rolled sheets produced according to the invention are carried out in a different manner.

In the case of sheets intended for forming cans by drawing-redrawing (DRD), the hot-rolled sheet with a

thickness of about 2.3 mm is cold rolled with a cold-rolling ratio of 85 to 89%.

Next, the cold-rolled intermediate sheet is continuously annealed at a temperature of approximately 650°C for a time of about 20 seconds.

The second cold rolling or finish rolling is carried out in a skin-pass mill with a reduction ratio of between 23 and 31%.

In the case of sheets intended for manufacturing drinks cans by drawing and wall ironing (DWI), the hot-rolled sheet with a thickness of about 3 mm is cold rolled with a reduction ratio of 90 to 93%.

An annealing operation is carried out at a temperature of about 670°C for a time of approximately 30 seconds.

The final skin-pass rolling is carried out with a reduction ratio of 2.5 to 17%.

The high reduction ratio during the final rolling in the case of DRD sheets makes it possible to develop high mechanical properties in the cold-rolled sheets.

Table 3 below gives, in the first column, the reference numbers of the sheets, which correspond to the reference numbers in Tables 1 and 2, the various sheets being differentiated, with regard to their composition, mainly by their aluminium content.

TABLE 3

(see next page)

The first three sheets have compositions according to the invention while the next four sheets are comparative sheets.

Column 2 in Table 3 gives the reduction ratio of the hot-rolled sheets during a first cold-rolling operation. This cold-rolling operation is followed by a second, skin-pass, cold rolling operation with an identical elongation, of 2.5%, for all the sheets.

The third column gives the continuous annealing temperature (Rc).

TABLE 3

Reference	CR red. ratio (%)	RC	Sampl dir.	R_e	R_m	A%	rd	nd	r_aver	n_aver	ΔC	GI-El
M825 880°C/530°C 2.72 mm	89.7	670°C	L	244	347	37.6	1.85	0.207				
			L	240	346	35.5	1.78	0.206				
			T	257	347	33.2	2.33	0.194	1.82	0.200	0.10	10.5-1.0
			T	246	343	40.7	2.68	0.205				
			45	250	342	34.1	1.55	0.197				
			45	257	350	32.8	1.62	0.198				
R2116A 875°C/570°C 2.96 mm	90.0	670°C	L	285	370	26.0	1.62	0.157				
			L	280	368	26.8	1.62	0.160				
			T	289	376	30.2	2.08	0.159	1.62	0.157	0.08	10.5-1.0
			T	290	378	27.2	2.07	0.155				
			45	270	362	29.4	1.50	0.155				
			45	271	366	30.4	1.48	0.158				
R2115A 883°C/563°C 2.95 mm	90.3	670°C	L	258	361	26.1	1.57	0.196				
			L	259	359	26.6	1.59	0.197				
			T	257	359	28.7	2.17	0.198	1.63	0.195	0.12	10.5-1.0
			T	262	359	29.6	2.17	0.198				
			45	266	360	27.0	1.39	0.192				
			45	265	360	32.8	1.51	0.195				
R1048 C1 894°C/560°C 3.01 mm	91.4	670°C	L	255	352	34.3	1.53	0.201				
			L	255	353	34.1	1.51	0.202				
			T	262	351	35.6	2.05	0.192	1.54	0.199	0.07	10.5-1.0
			T	260	352	36.4	2.04	0.198				
			45	256	353	32.0	1.35	0.201				
			45	256	352	36.7	1.40	0.200				
R1285 900°C/590°C 3.09 mm	91.9	670°C	L	267	366	29.2	1.51	0.190				
			L	266	366	28.0	1.44	0.192				
			T	271	363	28.8	1.79	0.186	1.48	0.188	-0.03	11.4-1.4
			T	268	363	27.0	1.77	0.184				heterogeneous structure
			45	267	357	26.2	1.39	0.184				
			45	265	353	27.2	1.37	0.191				
S385 881°C/579°C 2.00 mm	91.3	700°C	L	290	368	33.2	1.57	0.165				
			L	288	369	34.3	1.59	0.168				
			T	295	369	31.6	2.12	0.157	1.68	0.161	-0.03	11.4-1.4
			T	295	368	28.8	2.04	0.150				heterogeneous structure
			45	287	363	30.2	1.50	0.163				
			45	283	361	32.4	1.67	0.159				
R1757A 871°C/559°C 3.04 mm	91.1	700°C	L	267	366	25.5	1.40	0.190				
			L	270	366	26.2	1.42	0.189				highly elongated very heterogeneous structure
			T	275	363	26.5	1.85	0.176	1.46	0.184	-0.08	
			T	278	366	24.7	1.81	0.177				
			45	272	355	26.9	1.35	0.186				
			45	273	355	27.3	1.44	0.185				

Next, a series of mechanical properties were

measured on the sheets after the final skin-pass rolling, as will be indicated below.

The reduction ratio during the first cold rolling operation, which is about 90% or slightly higher, and the reduction ratio during the second cold rolling operation, which is about 2.5%, are characteristics of DWI sheet production.

Test samples were removed from the sheets obtained after the final skin-pass rolling, the sampling direction of the test pieces being given in the fourth column of Table 3 (L: in the length direction of the sheet, T: in the transverse direction, 45: at 45°).

The next columns in Table 3 give the measured values of the yield stress R_e, the tensile strength R_m, the elongation A%, the Lankford coefficient rd and the parameter nd for each of the test pieces taken from the sheets.

Indicated in the next columns are the average Lankford coefficient r_{aver} and the parameter n_{aver} for the entire sheet.

The next column gives the measured plane anisotropy coefficient ΔC which, as may be seen, is close to zero.

The final column gives the grain characteristics in the form of the grain index GI and the grain elongation El.

The measured results given in Table 3 will be commented on subsequently with regard to Figures 3 to 6 in which the results have been plotted in the form of graphs.

A first objective of the study made on the sheets, whose reference numbers are given in Table 3, was to determine the influence of the aluminium content of the sheets on the recrystallization temperature and on the recrystallization microstructure obtained in the sheets after the final cold-rolling operation.

Between the two cold sheet rolling operations, various continuous-annealing simulations were made on specimens of the sheets in order to determine the amount

of recrystallization as a function of the continuous-annealing hold temperature for the various sheets, the compositions of which are given in Table 1.

The results are given in Figure 1, in which the recrystallization curves have been plotted for each of the sheet compositions, the first three sheets having compositions corresponding to the process according to the invention and the next four being comparative sheets.

The hold time at the annealing temperature is in all cases 30 seconds.

The three sheets according to the invention have virtually the same recrystallization curve, plotted by the solid line in Figure 1.

Complete recrystallization annealing is obtained at 640°C.

The R1285 sheet containing 37 thousandths of a per cent aluminium, the recrystallization curve of which is indicated by the dot-dash line, shows a complete recrystallization temperature of about 660°C.

The S 385 sheet containing 56 thousandths of a per cent aluminium has a complete recrystallization temperature of about 680°C and the R1757 sheet containing 64 thousandths of a per cent aluminium has a complete recrystallization temperature of 710°C.

A 40° shift in the recrystallization temperature of the sheets is therefore observed when the aluminium content goes from contents corresponding to the process for producing sheets according to the invention to a sheet containing 64 thousandths of a per cent aluminium. In the case of the sheets containing 37 and 56 thousandths of a per cent aluminium, respectively, the shift is approximately 20°C and 40°C, respectively.

With regard to the R1048 sheet containing 24 thousandths of a per cent aluminium, the shift in the recrystallization temperature is less than 20°C.

Figures 2A, 2B, 2C, 2D and 2E are micrographs at a magnification of 290 showing the grains of sheets according to the invention after the annealing.

Figure 2A shows the microstructure of a cold-

rolled sheet whose aluminium content is 2 thousandths of a per cent, this sheet corresponding to the M825 sheet in Tables 1, 2 and 3. The grains in the sheet are of uniform shape and are equiaxed and the grain index is 10.5 with

5   a grain elongation of 1.

Figure 2B is a micrograph showing the grains in a sheet containing 8 thousandths of a per cent aluminium, which corresponds to the R2116A sheet in the tables. The grains in the sheet are equiaxed and have a homogeneous

10 structure and homogeneous size. The grain index and the grain elongation are identical to the case in Figure 2A.

Figure 2C is a micrograph of a sheet containing 24 thousandths of a per cent aluminium, which corresponds to the R1048 C1 sheet mentioned in the tables.

15 The grains in the sheet are no longer of homogeneous size and of purely equiaxed structure.

The grain index GI is 10.8 and the grain elongation is 1.0.

Figures 2D and 2E are micrographs of sheets

20 containing 37 and 64 thousandths of a per cent aluminium, respectively, these sheets corresponding to the R1285 and R1757A sheets in the tables.

The grains no longer have an equiaxed structure but an irregular and elongate structure known by the name

25 "pancake" structure.

The grain indices are 11 and 11.5 and the grain elongations are 1.4 and 2, respectively.

It is therefore apparent that for aluminium contents of 2 and 8, i.e. for sheets produced according

30 to the process of the invention, the grains are homogeneous and of equiaxed shape, which presages uniform drawing behaviour and a reduced risk of defects such as drawing ears.

In contrast, in the case of the sheets produced

35 according to the process of the prior art with an aluminium content greater than 10 thousandths of a per cent, the grains are no longer homogeneous and equiaxed, which would suggest inferior drawing behaviour.

In addition, a low aluminium content, of less

than 10 thousandths of a per cent, makes it possible to obtain good microstructural homogeneity in the longitudinal and transverse directions.

The mechanical properties given in Table 3 are plotted in Figures 3 and 4 in the form of diagrams giving the yield stress R_e and the tensile strength R_m in MPa as a function of the aluminium content.

Most of the points relating to the measurements of the yield stress and the mechanical strength in the longitudinal direction and in the transverse direction fall on straight lines which have been plotted as the dotted lines in Figures 3 and 4. In general, the yield stress R_e and the tensile strength R_m increase with the aluminium content.

In the case of the steels produced according to the process of the invention, the yield stress and the tensile strength reduced to a 25 ppm carbon content are slightly greater than 250 and 345 MPa, respectively.

Figures 5A, 5B and 5C show variations in the Lankford coefficients in the longitudinal direction, in the transverse direction and at 45°.

A Lankford coefficient of high value is indicative of a high standard anisotropy conducive to drawing.

As may be seen in the curves in Figures 5A, 5B and 5C, whatever the sampling direction of the test pieces, the Lankford coefficient r is high for aluminium contents close to zero and then decreases before stabilizing at a minimum value for the highest aluminium contents.

Figure 6 shows the average Lankford coefficient for the entire sheet, r_{aver}, as a function of the aluminium content.

By plotting the curve passing through the measurement points, it may be seen that the value of the coefficient r_{aver} extrapolated to 0% aluminium is about 1.9 and that, for an aluminium content of 10 thousandths of a per cent, the value of the Lankford coefficient is slightly greater than 1.60 (1.63).

It is assumed that a value of the average Lankford coefficient greater than 1.6 enables the necking drawability to be improved.

Above 10 thousandths of a per cent aluminium in the steel sheets, the average Lankford coefficient very rapidly falls below 1.6 before stabilizing at around 1.45 in the case of the highest aluminium contents of the sheet specimens on which the tests were carried out.

TABLE 4

Steel	C	Mn	Al	N	HR T_{fin}	T_{coil}	CR red.ratio	T_{anneal}	r	ΔC	GI
A	7	188	15	4.7	870	620	90.1	650°C 30s	1.40	-0.35	11.6
B	8	199	13	4.3	870	715	89.7	650°C 30s	1.60	-0.20	10
C	3.2	201	10	3.5	883	563	90.3	670°C 30s	1.68	0.12	10.5
D	5.3	200	12	5.6	865	670	89.5	670°C 30s	1.65	-0.02	9
E	5.8	209	12	4.9	865	540	90.0	670°C 30s	1.63	-0.07	10.7
F	12	204	12	5.5	872	590	90.2	650°C 30s	1.30	-0.38	11.3
G	13	187	6	4.8	869	595	89.9	650°C 30s	1.35	-0.36	10.8
H	12	204	12	5.5	874	700	90.1	650°C 30s	1.50	-0.20	10.3
I	13	187	6	4.8	872	695	90.0	650°C 30s	1.55	-0.20	9.1
J	3.5	202	8	3.5	875	698	89.8	670°C 30s	1.69	0.04	9
K	2.7	204	33	2.3	868	555	89.9	650°C 8h	1.88	0.24	7
L	2.7	204	33	2.3	868	555	91.1	670°C 30s	1.66	0.06	11

Table 4 gives the compositions, rolling, coiling and annealing temperatures and the characteristics r, ΔC and GI relating to drawability for sheets constituting comparative examples with respect to the sheets according

to the invention featuring in the first part of Table 3 above.

The steels of the comparative examples, the reference numbers of which are given in the first column in Table 4, apart from steel C, which corresponds to steel R2115A according to the invention shown in Table 3, have compositions which differ from the composition of a steel according to the invention, either by their carbon content (steels G and I) or by their aluminium content (steels D, E, J, K and L), or else by both their carbon content and their aluminium content (steels A, B, F and H).

In addition, the sheets having the compositions B, D, H, I and J were coiled, after hot rolling at a temperature above 620°C, which is the upper limit of the coiling temperature in the case of the invention.

The sheets of the comparative examples given in Table 4 have drawability characteristics which are generally inferior to the drawability characteristics of the steels of the invention. Furthermore, these steels, when they have aluminium contents greater than 10 thousandths of a per cent, exhibit a structural homogeneity and an inclusion cleanliness which are inferior to the steels of the invention.

By comparing the characteristics of the sheet of Example C according to the invention with Example J, which has a composition according to the invention and which was obtained by a process in which the hot-rolled sheet was coiled at a temperature above 620°C (namely 698°C), it is apparent that the sheets obtained have Lankford coefficients r which are very similar and substantially greater than 1.60 and ΔC values close to 0. However, the ASTM grain index GI of the sheet according to Example J is less than the grain index of the sheet according to Example C and less than 10. The final grains in the sheet are therefore not as fine in the case in which the sheet was coiled at a higher temperature.

In the case of the sheet of Example A, the steel has a carbon content (70 ppm) which is greater than the

60 ppm limit of the sheets produced according to the invention and the hot-rolled sheet is coiled at 620°C, i.e. at the upper limit of the coiling temperature range according to the invention. The Lankford coefficient r is low (only 1.40). The anisotropy coefficient ΔC is very different from 0 (namely -0.35). However, the grain size index (11.6) is quite satisfactory.

In the case of the sheet of Example B, the composition of which is close to that of the steel according to Example A, the coiling temperature is 715°C, i.e. a temperature substantially greater than the 620°C limit. Sheet B has a relatively satisfactory Lankford coefficient (1.60), an anisotropy coefficient quite far from 0 (namely -0.20) and a grain index less than the grain index in the case of sheet A.

In the case of the sheet of Example D, compared with Example E, steels D and E being steels containing 53 and 58 ppm carbon, respectively, the increase in the coiling temperature above 620°C (670°C) has virtually no effect on the Lankford coefficient and on the anisotropy coefficient. On the other hand, the grain index goes from 10.7 to 9 when the coiling temperature goes from 540°C (Example E) to 670°C (Example D).

In the case of Examples H and I, a carbon content substantially greater than 6 thousandths of a per cent (12 and 13 thousandths of a per cent) results, in the sheet obtained, in a low Lankford coefficient and an anisotropy coefficient ΔC far from zero. In the case of Examples F and G, the compositions of steels F and G being identical to the compositions of alloys H and I, respectively, the coiling temperatures of the hot-rolled sheet are below 620°C, the r and ΔC characteristics are very poor but the grain index is satisfactory and more favourable than in the case of Examples H and I in which the hot-rolled sheet was coiled at temperatures of about 700°C.

In the case of all the sheets of the examples mentioned above, a recrystallization annealing operation is carried out continuously, for a time of about

30 seconds, at a temperature of about 650°C or slightly higher.

These comparative examples show that, on the one hand, a carbon content of less than 6 thousandths of a per cent (or 60 ppm) is necessary in the composition of the steel in order to obtain a sheet having satisfactory r and ΔC characteristics. Moreover, these examples also show that, in the case of a carbon content of less than 6 thousandths of a per cent, a moderate coiling temperature, generally below 620°C, makes it possible to obtain a satisfactory grain index which is generally greater than 10, i.e. a fine-grained sheet.

In general, the coiling will be carried out at a temperature of between 450°C and 620°C and preferably between 530 and 570°C, as is apparent in particular from Table 1, if the first three examples in the table, which are examples of steels according to the invention, are considered.

If a steel having a carbon content greater than 60 ppm is used, Example B in Table 4 shows that relatively satisfactory r and ΔC characteristics may be obtained by coiling the hot-rolled sheet at a temperature of about 715°C. However, the grain index is then only 10 whereas it was 11.6 in the case of the steel of Example A.

In the context of the process according to the invention, in order to obtain a fine-grained sheet having good drawability characteristics, a steel is produced whose carbon content is less than 60 ppm and the coiling temperature of the hot-rolled sheet is limited to a range of between 450°C and 620°C, after rapidly cooling the hot-rolled sheet.

It was shown earlier that, in the case of a steel having a carbon content of less than 60 ppm, lowering the aluminium content to below 10 thousandths of a per cent made it possible to obtain very good drawability characteristics, in addition to great structural homogeneity and very good inclusion cleanliness.

Comparing the Examples in Table 4, F and G on the

one hand and H and I on the other hand, it may be seen that lowering the aluminium content from 12 to 6 thousandths of a per cent has virtually no effect on the r and ΔC parameters, the values of which remain quite poor

5   in the case of the steels containing 12 and 13 thousandths of a per cent carbon. This effect is almost identical whatever the coiling temperature of the hot-rolled sheet.

In contrast, in the context of the invention, when the carbon content is less than 6 thousandths of a

10   per cent in the steel, lowering the aluminium content below 10 thousandths of a per cent makes it possible to improve the r and ΔC parameters significantly.

The drawing sheets according to the invention must have sufficiently fine grains (grain index at least

15   equal to 9) and a homogeneous structure.

In order to obtain this result, the sheet is rapidly cooled between the temperature at the end of hot rolling and the coiling temperature, which must be below 620°C. This rapid cooling and the coiling at a relatively

20   low temperature make it possible to limit grain growth in the hot-rolled sheet and to obtain a good grain index in the final sheet obtained after cold rolling.

As is apparent from Table 4 (Example K), an ultra-low-carbon and ultra-low-aluminium steel obtained

25   by vacuum degassing in the steelworks, which is annealed at 650°C for eight hours, has a high Lankford coefficient r (1.88), an anisotropy coefficient substantially different from 0 (0.24) and a very low grain index (GI = 7).

When the same steel is used for manufacturing a

30   sheet which is continuously annealed at 670°C for 30 seconds (Example L), the r and ΔC coefficients as well as the grain index have satisfactory values, although the aluminium content of the steel is substantially greater than the limit given in the case of the invention.

35   However, in this case it is not possible to guarantee very good structural homogeneity and very good inclusion cleanliness.

In the case of ultra-low-carbon steels, as shown by Examples K and L, it is preferable to anneal con-

tinuously at a temperature slightly above 650°C, for example 670°C, for a time of 30 seconds. Annealing at these temperatures for a long time results, in addition to increasing the production cost of the sheets, in a

5   degradation in the anisotropy coefficient ΔC and in the grain index.

As may be seen in Table 1, the steels used in the context of the invention contain very small amounts of titanium, of about 1 to a few ppm. It has also been shown

10   that the titanium content is limited to 10 ppm, and preferably to 6 ppm, in the steel so as to avoid increasing the recrystallization temperature of the steel.

It has been demonstrated that, for a titanium content of 10 ppm, the recrystallization temperature is

15   670°C, instead of 640°C in the case of a substantially zero titanium content. Because the annealing has to be carried out at 20°C or 30°C above the recrystallization temperature of the steel, the titanium content must not exceed 10 ppm in order to have an annealing temperature

20   of at most 700°C. Furthermore, titanium, in an amount greater than 10 ppm, shifts the anisotropy coefficient ΔC with respect to the zero value.

Likewise, niobium increases the recrystallization temperature of the steel in amounts substantially similar

25   to titanium. For a niobium content of 3 ppm, the recrystallization temperature of the steel is equal to 640°C while in the case of 10 ppm of niobium it is 680°C. The niobium content is therefore limited to 10 ppm in order to limit the annealing temperature of the steel to

30   a value close to 700°C, while at the same time ensuring complete recrystallization throughout the coil of sheet.

The steels used in the context of the invention are therefore steels substantially free of titanium and of niobium, the contents of these elements being limited

35   to 10 ppm, i.e. 0.001% by weight.

The drawing sheets obtained by the production process according to the invention, which in particular have a carbon content at most equal to 6 thousandths of a per cent and an aluminium content at most equal to

10 thousandths of a per cent, have, after the final cold rolling, a homogeneous microstructure containing equiaxed grains and very good drawability characteristics. In particular, the microstructure of the sheet is very homogeneous in the transverse direction and the edges of the sheet have homogeneous equiaxed grains, the size of which is slightly greater than the size of the grains in that part of the strip near the axis. In addition, studies have shown that the sheets obtained by the process of the invention exhibit very good inclusion cleanliness when deoxidation is carried out by slag and when a continuous casting is carried out under inert conditions.

In particular, slag reduction has an effect on the mean square deviation of the inclusion sizes and on the number of inclusions in the steel. Furthermore, the very low aluminium content decreases the average density of inclusions in the steel.

Very good inclusion cleanliness is of great value, in particular in the case of very thin sheets used for the manufacture of metal packages, such as drinks cans, by drawing.

The production process according to the invention makes it possible to decrease the amount of scrap due to heterogeneous microstructures or to the presence of unacceptable inclusions in sheets for drawing, and in particular in DWI-sheets for drawing and wall ironing.

Furthermore, the process according to the invention, which uses very small amounts of aluminium for killing the steel, allows savings to be made in the purchase of aluminium in the context of the production of sheets for drawing.

The invention is not limited to the embodiment which has been described.

Thus, the killing of the steel may be carried out other than by slag reduction and the presence of aluminium in the steel of drawing sheets with a content of less than 10 thousandths of a per cent makes it possible in itself to obtain substantial advantages with regard to

the microstructure, the homogeneity and the drawability
of the steel sheet.

The invention applies equally well to DRD drawing
sheets as to DWI drawing sheets. The rolling ratios
5   during the first and second cold-rolling operations may
be adapted to the use of the sheet for the production of
specific drawn packaging products.

CLAIMS

1.   Process for producing a thin sheet of ultra-low-carbon steel for the manufacture of drawn products for packaging, in which process:

- a killed and vacuum-degassed steel containing, by weight, between 0.10 and 0.35% manganese, less than 0.006% nitrogen, less than 0.025% phosphorus, less than 0.020% sulphur, less than 0.020% silicon, at most 0.08% of one or more of the elements copper, nickel and chromium, as well as aluminium, the balance of the composition consisting of iron and inevitable impurities, is produced,

- the steel is cast in the form of a slab,

- the slab is hot rolled at a temperature above Ar3 in order to obtain a strip of hot-rolled sheet,

- the hot-rolled sheet is coiled,

- the hot-rolled sheet is cold rolled into the form of an intermediate cold-rolled sheet,

- the intermediate cold-rolled sheet is continuously annealed at a temperature below Ac1,

- the intermediate cold-rolled sheet is rerolled down to a final sheet thickness for drawing,

characterized in that the steel is produced so as to contain at most 0.006% carbon by weight and 0.010% aluminium by weight and in that the said hot-rolled sheet is coiled at a temperature below 620°C and preferably between 530 and 570°C.

2.   Process according to Claim 1, characterized in that the steel contains at most 0.001% titanium by weight and 0.001% niobium by weight and in that the cold-rolled sheet is annealed at a temperature below 700°C for a time of less than 3 minutes and preferably about 30 seconds.

3.   Process according to Claim 2, for the manufacture of a thin drawing sheet using the DRD drawing-redrawing process, characterized in that the hot-rolled sheet has a thickness of about 2.3 mm, in that the hot-rolled sheet is rolled with a reduction ratio of between 85 and 89%, in that the cold-rolled intermediate sheet is annealed by continuous annealing at a temperature of approximately

650°C, for approximately twenty seconds, and in that the cold-rolled intermediate sheet is rerolled in a skin-pass rolling mill with a reduction ratio of between 23 and 31%.

5   4.   Process according to Claim 2 for the production of a drawing sheet using the DWI drawing and wall ironing process, characterized in that the hot-rolled sheet has a thickness of about 3 mm, in that the hot-rolled sheet is cold rolled with a reduction ratio of 90 to 93%, in

10   that the intermediate cold-rolled sheet is continuously annealed at a temperature of about 670°C for a time of about thirty seconds and in that, after annealing, the intermediate sheet is rerolled in a skin-pass rolling mill with a reduction ratio of between 2.5 and 17%.

15   5.   Process according to any one of Claims 1 to 4, characterized in that the steel is killed in contact with a slag having an adjusted amount of aluminium and of alumina.

6.   Process   according   to   claim   5   ,

20   characterized in that the steel is cast in the form of a slab in an inert-atmosphere continuous casting plant.

7.   Thin sheet of ultra-low-carbon steel, for the manufacture of drawn packaging products, containing, by weight, between 0.10 and 0.35% manganese, less than

25   0.006% nitrogen, less than 0.025% phosphorus, less than 0.020% sulphur, less than 0.020% silicon, at most 0.08% of one or more of the elements copper, nickel and chromium, as well as of aluminium, the balance of the composition consisting of iron and inevitable impurities, the

30   thin sheet being obtained by cold rolling a hot-rolled sheet by a first rolling operation and by a second rolling operation separated by a continuous annealing operation, characterized in that the steel of the sheet contains at most 0.006% carbon by weight and 0.010%

35   aluminium by weight, in that it has a homogeneous structure with equiaxed grains and in that it has a Lankford coefficient (r_{aver}) greater than 1.6 and a plane anisotropy coefficient (ΔC) close to 0.
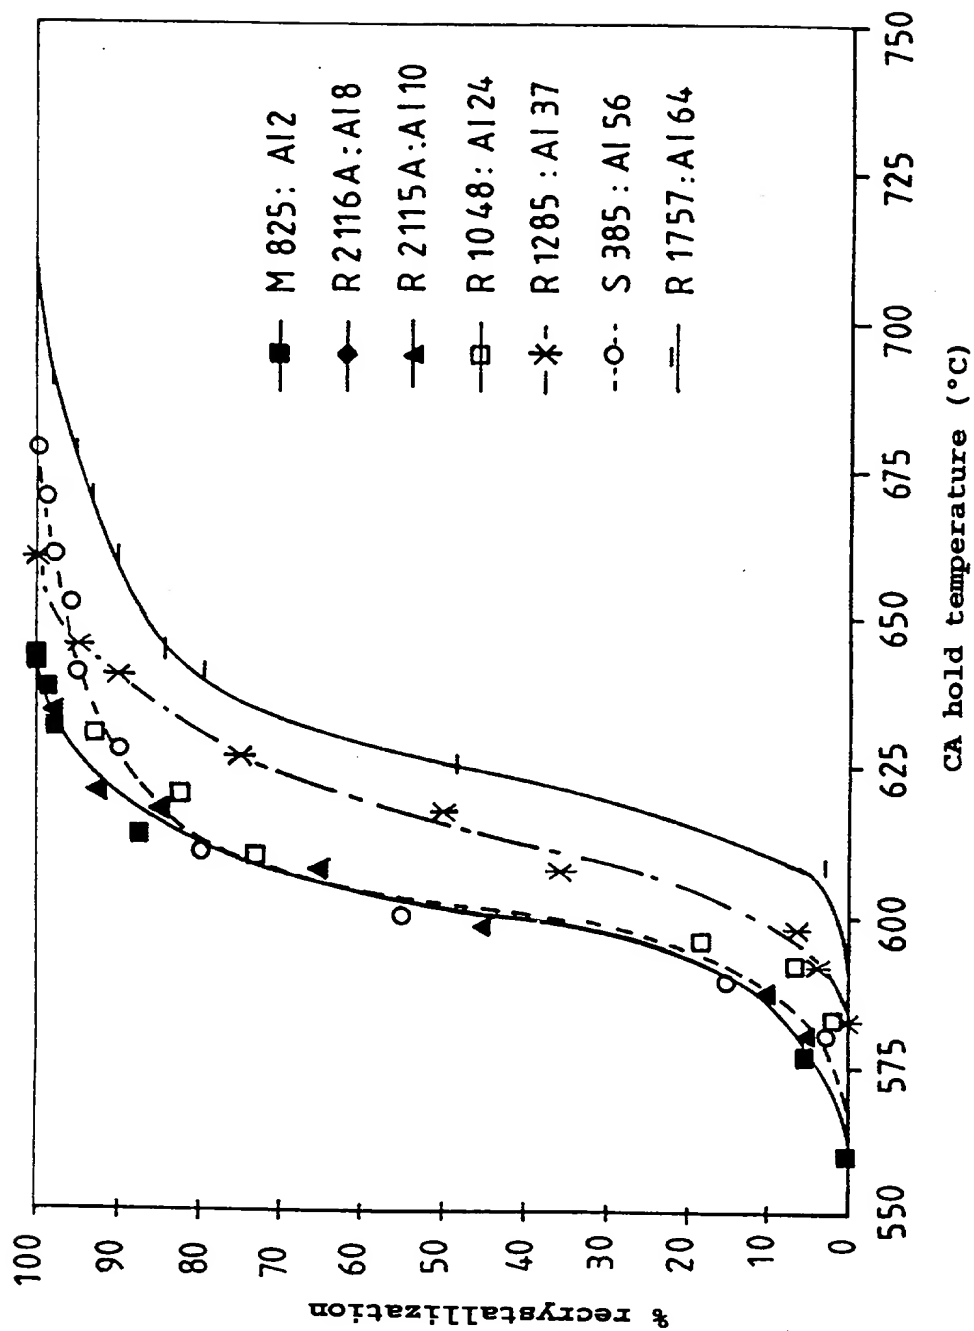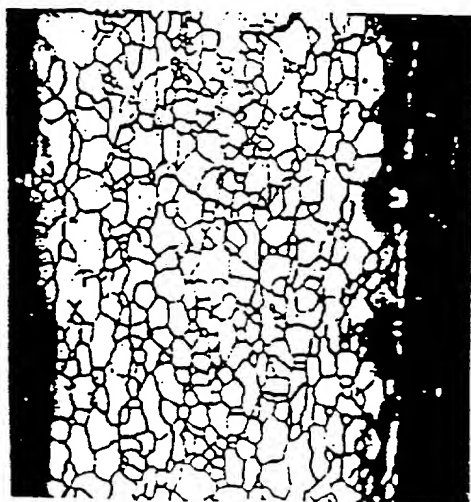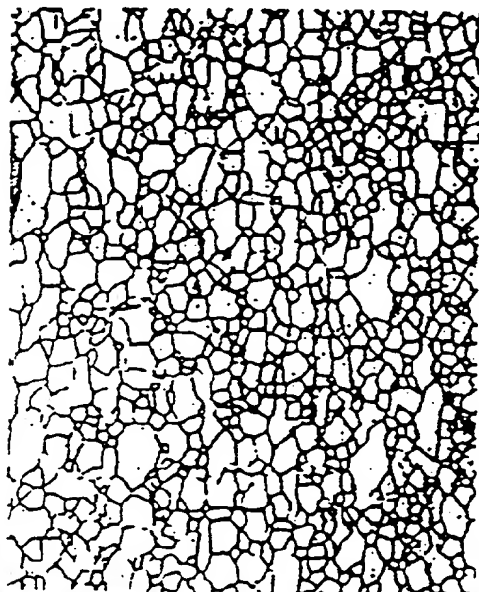
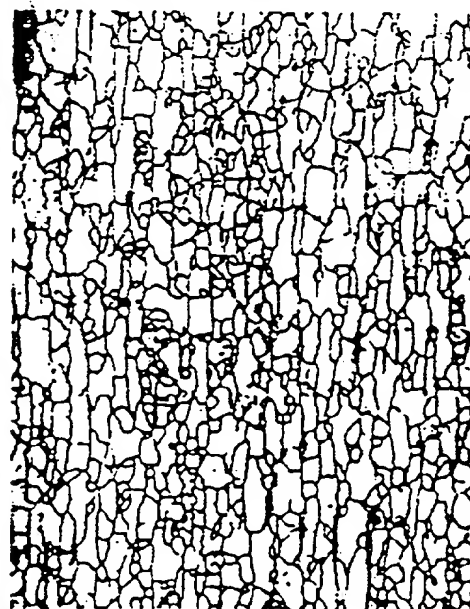FIG.1

FIG. 2A
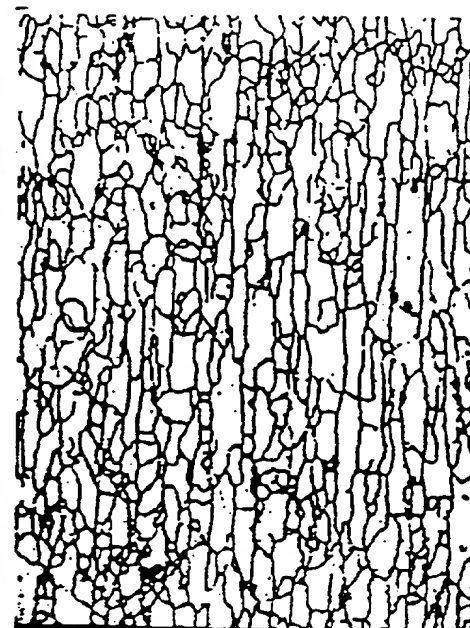Al=2×10⁻³% (GI:10.5-1.0)

FIG. 2B
Al=8×10⁻³% (GI:10.5-1.0)

FIG. 2C
Al=24×10⁻³% (GI:10.8-1.0)

FIG. 2D
Al=37×10⁻³% (GI:11.0-1.4)

FIG. 2E
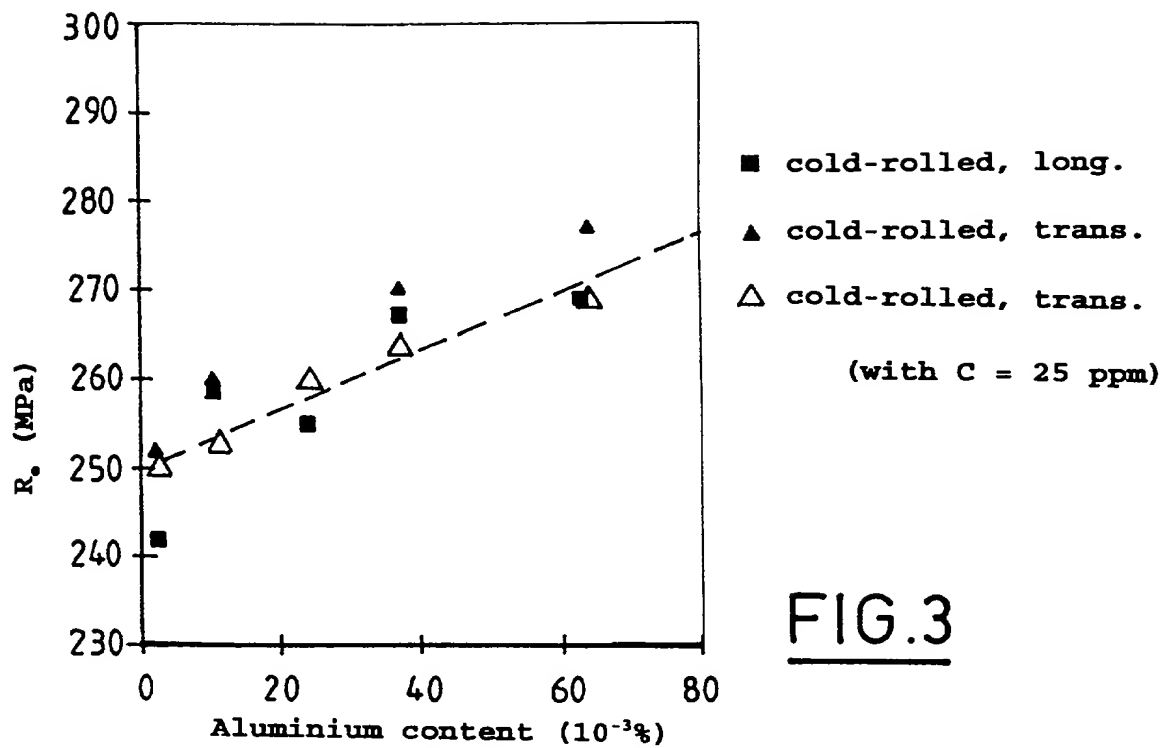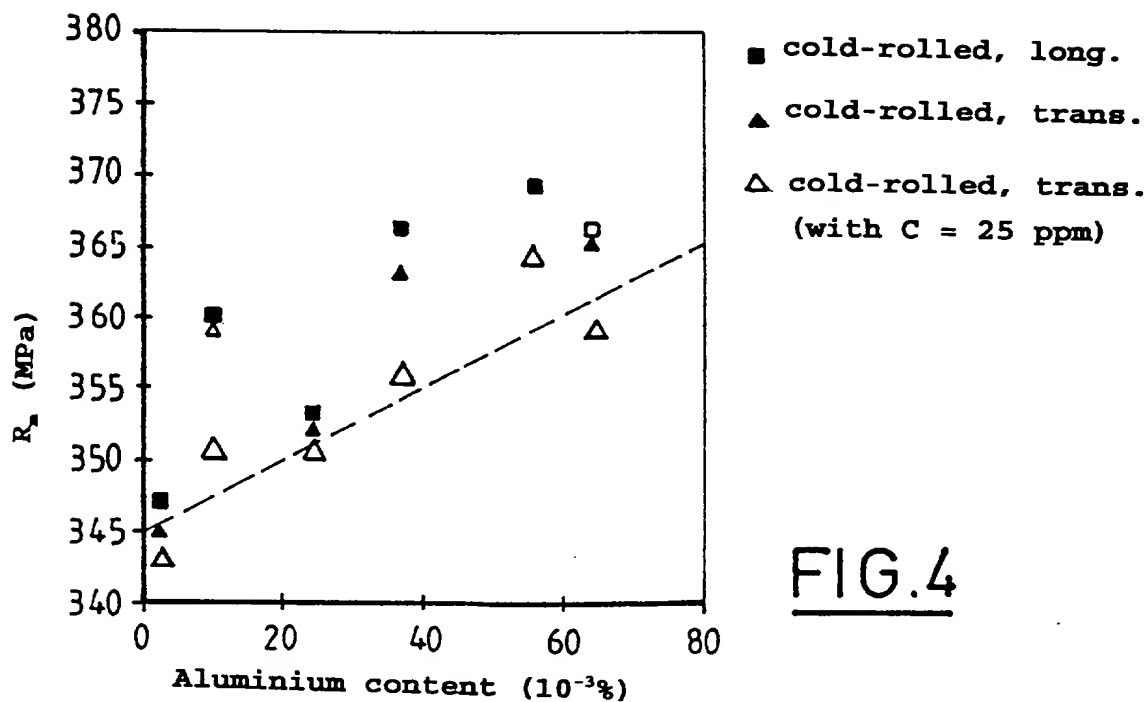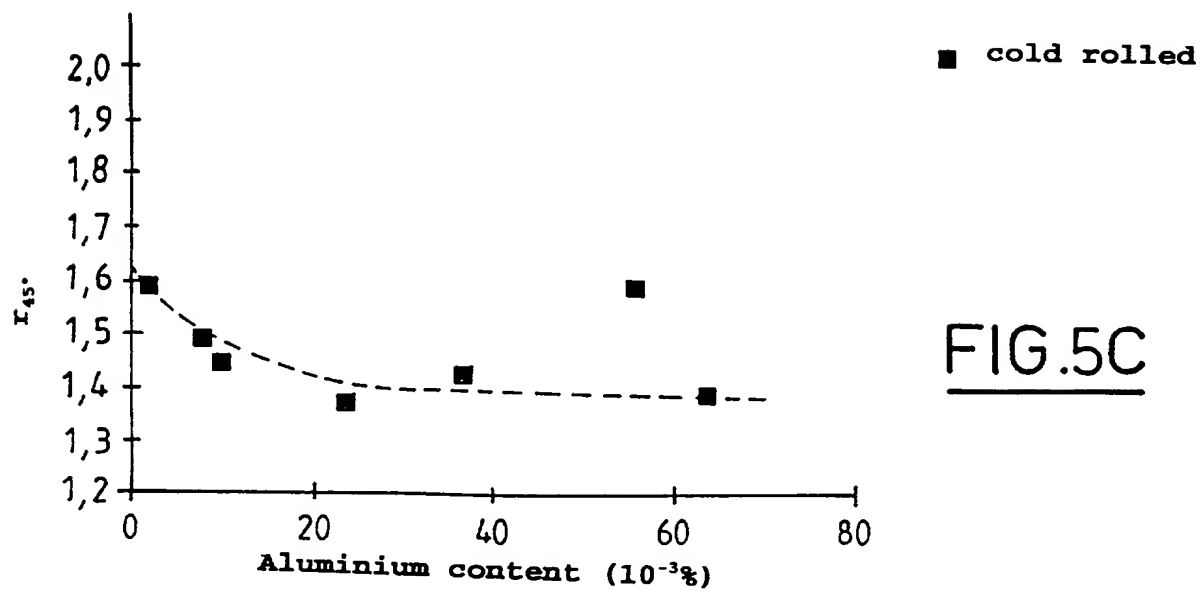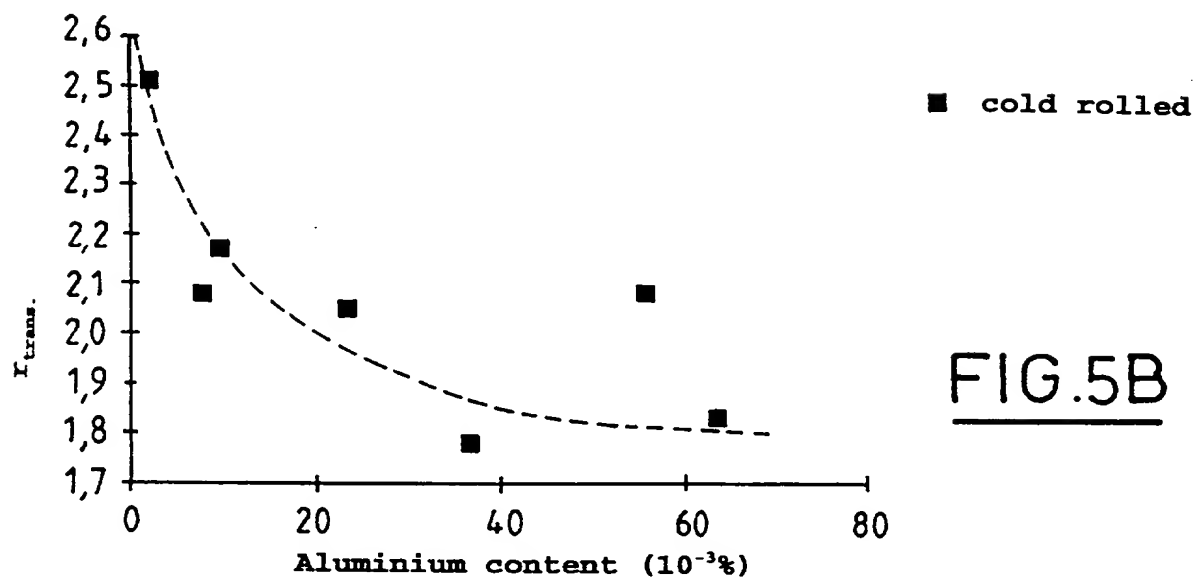Al=64×10⁻³% (GI:11.5-2.0)

FIG.3

■ cold-rolled, long.

▲ cold-rolled, trans.

△ cold-rolled, trans.

(with C = 25 ppm)

FIG.4

■ cold-rolled, long.

▲ cold-rolled, trans.
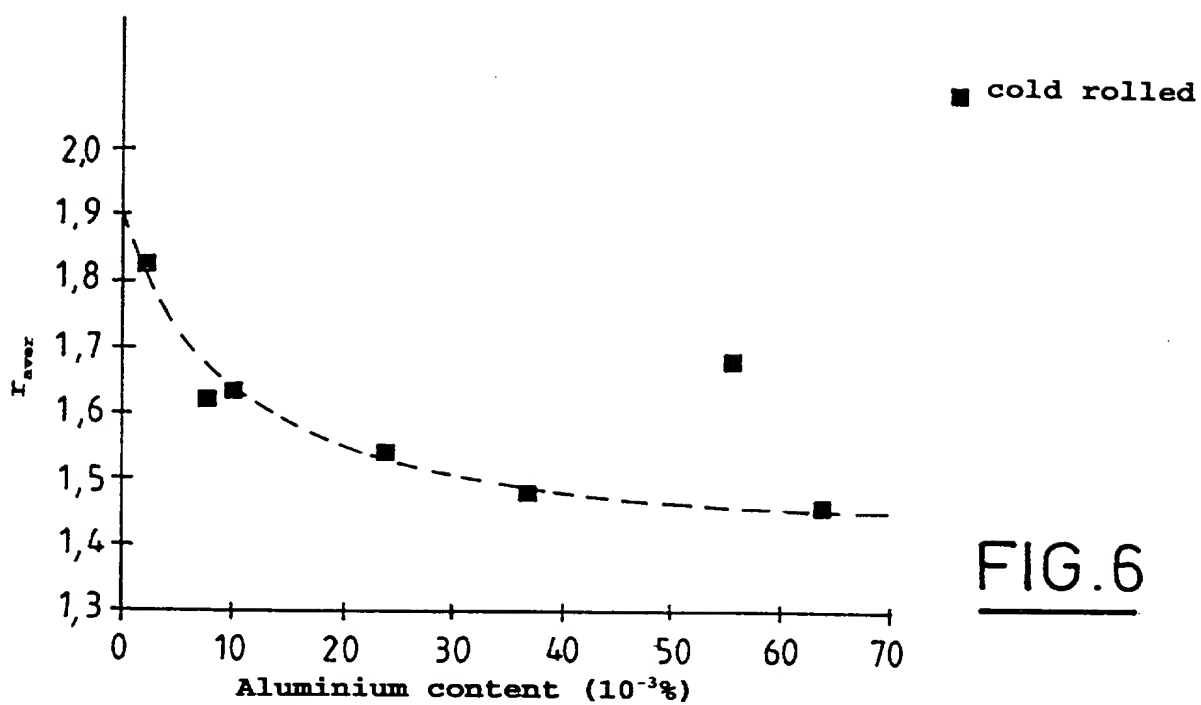
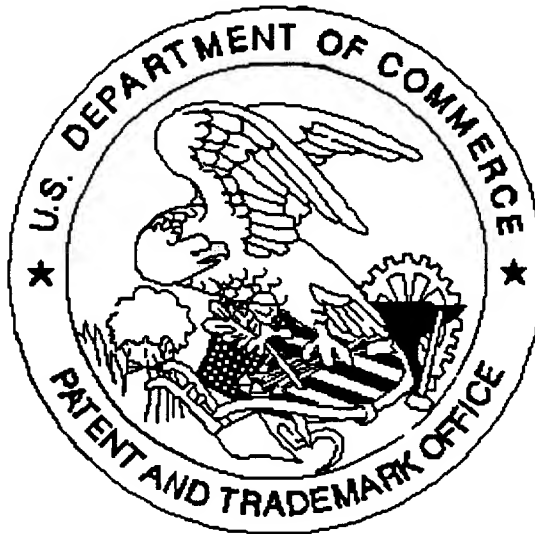△ cold-rolled, trans.
(with C = 25 ppm)

FIG.5A

FIG.5B

FIG.5C

FIG.6

United States Patent & Trademark Office
Office of Initial Patent Examination -- Scanning Division

Application deficiencies found during scanning:

1. Application papers are not suitable for scanning and are not in compliance with 37 CFR
   1.52 because:
   - ☐ All sheets must be the same size and either A4 (21 cm x 29.7 cm) or 8-1/2" x 11".
     Pages _____ do not meet these requirements.
   - ☐ Papers are not flexible, strong, smooth, non-shiny, durable, and white.
   - ☐ Papers are not typewritten or mechanically printed in permanent ink on one side.
   - ☐ Papers contain improper margins. Each sheet must have a left margin of at least
     2.5 cm (1") and top, bottom and right margins of at least 2.0 cm (3/4").
   - ☐ Papers contain hand lettering.

2. Drawings are not in compliance and were not scanned because:
   - ☐ The drawings or copy of drawings are not suitable for electronic reproduction.
   - ☐ All drawings sheets are not the same size. Pages must be either A4 (21 cm x 29.7 cm)
     or 8-1/2" x 11".
   - ☐ Each sheet must include a top and left margin of at least 2.5 cm (1"), a right margin of
     at least 1.5 cm (9/16") and a bottom margin of at least 1.0 cm (3/8").

3. Page(s)_____ are not of sufficient clarity, contrast and quality for
   electronic reproduction.

4. Page(s)_____ are missing.

5. OTHER:___NO DECLaration_____